



#### AC-DC BATTERY CHARGER

- ▶ 120~230W *Portable Battery Charger*
- ▶ 300~1000W *Stationary Battery Charger*

#### DC-AC POWER INVERTER

- ▶ 100~2500W *Modified Sine Wave*
- ▶ 200~3000W *True Sine Wave*
- ▶ 1500~3000W *True Sine Wave with Solar Charger*



**Total Solution For**

# Power Inverter & Battery Charger

# About Mean Well

Established in 1982, MEAN WELL is a leading manufacturer of standard switching power supplies. In response to the world's energy-saving trend, we've come up with a green power solution that include DC/AC inverters, solar inverters, and battery chargers, to fulfill the alternative energy requirements in the market. Those products are highly efficient, saves energy, low power consumption and approved by the global safety/EMC certificates per TUV, UL and CE, which greatly guarantee your safety for all-purpose solar power applications and any charging system, such as electric scooter, electric bicycle, electric wheelchair...etc.

Backed by 28 years' experience, we have over 3,000 products that allow us to provide "one stop shopping" to our customers. Every product in the Mean Well range is the result of rigid procedures governing design, design verification test (DVT), design quality test (DQT), component selection, pilot-run production, and mass production. With our network of over 100 distributors in over 70 countries globally, your order can be delivered within 24 hours. No minimum order required. To source from a trusted industry supplier, contact us today.



## Index

- 1 **GC/PB Series** 120~230W Portable Battery Charger
- 2 **PB Series** 300~1000W Stationary Battery Charger
- 3 **A301/302 Series** 100~2500W Modified Sine Wave Inverter
- 4-5 **TS Series** 200~3000W True Sine Wave Inverter
- 6 **TN Series** 1500~3000W True Sine Wave Solar Inverter
- 7 Setting Procedure via Front Panel for TN/TS Series
- 8 Comparison of UPS and Energy Saving Mode
- 9 Applications



# 120~230W Portable Battery Charger

Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.

## Features

- Universal AC input / Full range
- AC input range selectable by switch (PB-120)
- **No load power consumption < 1W (GC series)**
- **High efficiency up to 94%**
- Built-in active PFC function, PF>0.95 (except for PB-120)
- Built-in passive PFC function (PB-120)
- Fully enclosed plastic case (GC series)
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Cooling by free air convection
- Cooling by built-in DC fan (PB-120/230)
- Built-in ON/OFF power switch (PB-120/230)
- Built-in remote ON/OFF control (PB-230)
- Protections:
  - Short circuit / Overload / Over voltage / Over temperature / Reverse polarity (PB-120/230)
- LED indicator for charging status
- **Especially suitable for portable charge**
- Charger for Lead-Acid, Li-Lon, Gel cell batteries
- 2 years warranty



Model Name	GC120	GC160	GC220	P□ -120 □ =A: pulse charge B: 2 section voltage charge	PB-230
AC input voltage range	85~264VAC		90~264VAC	90~132VAC / 180~264VAC selectable by switch	90~264VAC
Charge style	2 stage			3 stage	
Over voltage protection	105%~135%, shut off O/P voltage, re-power on to recover			108%~125%, shut off output voltage, re-power on to recover	
Withstand voltage	I/P-O/P: 3kVAC, 1 minute				
Working temperature	-30~+70°C (derating >50°C)		-10~60°C	-10~+45°C	-20~+50°C
Safety standards	UL1012, EN60950-1			UL60950-1, TUV EN60950-1, EN60335-2-29 (except for 48V)	UL1012, TUV EN60950-1
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, FCC part15 class B			EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3	
Standard DC output plug	Power DIN 4P with lock type			MIC 3P, male type	MIC 4P, male type

### 120W

Model Name	Output	Effi.
GC120A12-□	13.6V, 7.50A	89.0%
GC120A24-□	27.2V, 4.42A	90.0%
GC120A48-□	54.4V, 2.21A	91.0%

□ = R7B, AD1

### 160W

Model Name	Output	Effi.
GC160A12-□	13.6V, 10.0A	89.0%
GC160A24-□	27.2V, 5.89A	92.5%
GC160A48-□	54.4V, 2.95A	94.0%

□ = R7B, AD1

### 218W

Model Name	Output	Effi.
GC220A12-□	13.6V, 13.5A	89.0%
GC220A24-□	27.2V, 8A	92.5%
GC220A48-□	54.4V, 4A	93.0%

□ = R7B, AD1

### 120W

Model Name	Wattage	Output	Effi.
P□ -120-13	99W	13.8V, 0~7.2A	73.0%
P□ -120-27	119W	27.6V, 0~4.3A	79.0%
P□ -120-54	121W	55.2V, 0~2.2A	79.0%

### 230W

Model Name	Wattage	Output	Effi.
PB-230-12□	230W	14.4V, 0~16A	82.0%
PB-230-24□	230W	28.8V, 0~8A	85.5%
PB-230-48□	230W	57.6V, 0~4A	86.0%

□ = Blank, AD1 ; Blank: Power DIN 4P, AD1: Anderson Connector

Model Name	Output Connector	Safety
GC120Axx-R7B GC160Axx-R7B GC220Axx-R7B PB-230-xx	 Power DIN 4P	 (GC series only)
GC120Axx-AD1 GC160Axx-AD1 GC220Axx-AD1 PB-230-xxAD1	 Anderson Connector	 (GC series only)

- UL1012 listed only for "Anderson Connector"
- xx = 12,24,48 ; R7B: power DIN 4P, AD1: Anderson Connector

# 300~1000W

## Stationary Battery Charger

### Features

- Universal AC input / Full range (PB-600/1000)
- AC input range selectable by switch (PB-300/360)
- Built-in passive PFC function (PB-300/360)
- Built-in active PFC function (PB-600/1000)
- 3 poles AC inlet IEC320-C14
- Cooling by built-in DC fan (except for PB-300)
- Built-in ON/OFF power switch
- Built-in remote ON/OFF control
- 2/8 stage smart charger for PB-600/1000
- Protections:
  - Short circuit / Overload /
  - Over voltage / Over temperature /
  - Reverse polarity
- LED indicator for charging status
- 3 years warranty

Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.



▲ PB-300  
253x 135x 48.5 mm



▲ PB-360  
253x 135x 48.5 mm



▲ PB-600  
230x 158x 70 mm



▲ PB-1000  
300x 184x 70 mm

Model Name	PB-300	PB-360	PB-600	PB-1000
AC input voltage range	90~132VAC / 180~264VAC selectable by switch		90~264VAC	
Charge style	3 stage		2 or 8 stage (selectable)	
Over voltage protection	108%~125%, shut off output voltage, re-power on to recover			
Withstand voltage	I/P-O/P: 3kVAC, 1 minute			
Working temperature	-10~+50°C		-20~+60°C	
Safety standards	PB-300/360: UL60950-1, CB IEC60335-2-29 (except for 48V) PB-600: UL1012, TUV EN60950-1 (48V only), TUV EN60335-2-29(except for 48V) PB-1000: UL60950-1, TUV EN60950-1			
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3			
DC output connector	Terminal block 2P			

### 300W

Model Name	Wattage	Output	Effi.
PB-300-12	300W	14.4V, 0~20.85A	85.0%
PB-300-24	302W	28.8V, 0~10.5A	86.0%
PB-300-48	305W	57.6V, 0~5.3A	88.0%

### 600W

Model Name	Wattage	Output	Effi.
PB-600-12	576W	14.4V, 0~40.0A	86%
PB-600-24	605W	28.8V, 0~21.0A	87%
PB-600-48	605W	57.6V, 0~10.5A	89%

### 360W

Model Name	Wattage	Output	Effi.
PB-360-12	350W	14.4V, 0~24.3A	85%
PB-360-24	360W	28.8V, 0~12.5A	86%
PB-360-48	360W	57.6V, 0~6.25A	87%

### 1000W

Model Name	Wattage	Output	Effi.
PB-1000-12	864W	14.4V, 0~60.0A	85%
PB-1000-24	999W	28.8V, 0~34.7A	88%
PB-1000-48	1002W	57.6V, 0~17.4A	89%

# 100~2500W Modified Sine Wave



Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.

## Features

- High frequency design
- Input protections:  
Reverse polarity / Over and under voltage / Battery low alarm and shutdown
- Output protections: Short circuit / Overload / Over temp.
- With power ON/OFF switch and LED indicator
- Built-in remote ON/OFF control for 1000~2500W (optional)
- **Built-in USB interface and without fan for 100W**
- Input and output fully isolation
- Low power consumption (standby)
- LVD meet EN60950-1 and e13 mark
- EMC meet EN61000-4-2,3, EN55022
- 1 year warranty


e13 CE




## AC Output Receptacle (optional) for A301/A302 Series

TYPE-1	TYPE-2	TYPE-3	TYPE-4	TYPE-5	TYPE-6
JAPAN	USA	EUROPE	UNIVERSAL	AUSTRALIA	U.K.

▶ Please consult MeanWell for other kinds of optional socket.  
TYPE-2,3 (standard model) ; TYPE-4,5,6 (optional model)



▲ 100W (Built-in USB)  
170mmx 65ø



▲ 150W / 230V  
165x 94x 69 mm



▲ 150W / 110V 122x 73x 45 mm



▲ 300W 165x 88x 74 mm



▲ 600W 210x 173x 65 mm



▲ 1000W 320x 210x 85 mm



▲ 1500W 455x 210x 85 mm



▲ 2500W 430x 210x 159 mm

Model Name	A301	A302
DC input rated voltage	12.5VDC	25.0VDC
AC output voltage / Frequency	110VAC(rms) / 60Hz or 230VAC(rms) / 50Hz	
Max. output power	100W, 150W, 300W, 600W, 1000W, 1500W, 2500W	
USB output power	5VDC / 500mA (100W only)	
AC output regulation	±10% of rated output voltage	
Bat. low alarm	10±0.5VDC	20.5±1.0VDC
Bat. low shut down	9.5±0.5VDC	19.5±1.0VDC
I/P over voltage protection	15~17VDC	30~32VDC
Working temperature	0~30°C (0~25°C for 2500W)	
LVD	Compliance to EN60950-1	
EMC	Compliance to EN55014-1, EN61000-3-2,3, EN61000-4-2,4,5,6,11	

### 100W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-100-F3	100W	10-15	230 / 50	TYPE-3	90%
A302-100-F3	100W	21-30	230 / 50	TYPE-3	90%

### 150W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-150-B2	150W	10-15	110 / 60	TYPE-2	78%
A301-150-F3	150W	10-15	230 / 50	TYPE-3	78%
A302-150-B2	150W	21-30	110 / 60	TYPE-2	82%
A302-150-F3	150W	21-30	230 / 50	TYPE-3	82%

### 300W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-300-B2	300W	10-15	110 / 60	TYPE-2	82%
A301-300-F3	300W	10-15	230 / 50	TYPE-3	82%
A302-300-B2	300W	21-30	110 / 60	TYPE-2	85%
A302-300-F3	300W	21-30	230 / 50	TYPE-3	85%

### 600W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-600-B2	600W	10-15	110 / 60	TYPE-2	82%
A301-600-F3	600W	10-15	230 / 50	TYPE-3	82%
A302-600-B2	600W	21-30	110 / 60	TYPE-2	85%
A302-600-F3	600W	21-30	230 / 50	TYPE-3	85%

### 1000W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-1K0-B2	1000W	10-15	110 / 60	TYPE-2	82%
A301-1K0-F3	1000W	10-15	230 / 50	TYPE-3	82%
A302-1K0-B2	1000W	21-30	110 / 60	TYPE-2	85%
A302-1K0-F3	1000W	21-30	230 / 50	TYPE-3	85%

### 1500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-1K7-B2	1500W	10-15	110 / 60	TYPE-2	82%
A301-1K7-F3	1500W	10-15	230 / 50	TYPE-3	82%
A302-1K7-B2	1500W	21-30	110 / 60	TYPE-2	85%
A302-1K7-F3	1500W	21-30	230 / 50	TYPE-3	85%

### 2500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
A301-2K5-B4	2500W	10-15	110 / 60	TYPE-2	82%
A301-2K5-F3	2500W	10-15	230 / 50	TYPE-3	82%
A302-2K5-B4	2500W	21-30	110 / 60	TYPE-2	85%
A302-2K5-F3	2500W	21-30	230 / 50	TYPE-3	85%

# 200~700W True Sine Wave



Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.

## Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- Output voltage / frequency adjustable
- High efficiency up to 91%
- Standby saving mode to conserve energy (TS-700)
- Built-in fan ON/OFF control function (TS-400/700)
- Fanless design, cooling by free air convection (TS-200)
- Front panel indicator for load / battery / operation status
- High frequency design

- Input protections:  
Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage
- Output protections:  
Short circuit / Overload / Over temperature
- Applications:  
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 3 years warranty



### TS-200



### TS-400



### TS-700



<b>Rated output power</b>	<b>200W</b>	<b>400W</b>	<b>700W</b>
<b>Maximum output power</b>	230W for 3 minutes; 300W for 10 sec.	460W for 3 minutes; 600W for 10 sec.	800W for 3 minutes; 1050W for 10 sec.
<b>Output surge rating</b> (30 cycles)	400W	800W	1400W
<b>DC input rated voltage</b>	12VDC, 24VDC or 48VDC		
<b>AC output voltage</b>	100 / 110 / 115 / 120VAC; 200 / 220 / 230 / 240VAC adjustable via front panel		
<b>Output frequency</b>	50Hz / 60Hz adjustable by front panel		
<b>AC output waveform</b>	True sine wave, THD<3.0%		
<b>AC output regulation</b>	±3% of rated output voltage		
<b>No load dissipation</b> (Typ.)	≤15W		≤6W@standby saving mode
<b>Working temperature</b>	-10 ~ +35°C@100% load (112/124/148), -10~+40°C@100% load(212/224/248); 60°C@50% load	-10~+40°C@100% load, 60°C@50% load	0~+40°C@100% load, 60°C@50% load
<b>Safety standards</b>	110V	design refer to UL458	
	230V	Compliance to EN60950-1	
<b>EMC standards</b>	110V	Compliance to FCC class A	
	230V	Compliance to EN55022 class A, E-Mark, EN61000-4-2,3,8, ENV50204	

### 200W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-200-112[A]	200W	10.5-15	110 / 60	TYPE-A	86.0%
TS-200-124[A]	200W	21.0-30	110 / 60	TYPE-A	87.5%
TS-200-148[A]	200W	42.0-60	110 / 60	TYPE-A	88.0%
TS-200-212[B]	200W	10.5-15	230 / 50	TYPE-B	86.0%
TS-200-224[B]	200W	21.0-30	230 / 50	TYPE-B	87.5%
TS-200-248[B]	200W	42.0-60	230 / 50	TYPE-B	88.0%

### 700W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-700-112[A]	700W	10.5-15	110 / 60	TYPE-A	86%
TS-700-124[A]	700W	21.0-30	110 / 60	TYPE-A	88%
TS-700-148[A]	700W	42.0-60	110 / 60	TYPE-A	89%
TS-700-212[B]	700W	10.5-15	230 / 50	TYPE-B	89%
TS-700-224[B]	700W	21.0-30	230 / 50	TYPE-B	90%
TS-700-248[B]	700W	42.0-60	230 / 50	TYPE-B	91%

### 400W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-400-112[A]	400W	10.5-15	110 / 60	TYPE-A	84.5%
TS-400-124[A]	400W	21.0-30	110 / 60	TYPE-A	86.0%
TS-400-148[A]	400W	42.0-60	110 / 60	TYPE-A	87.0%
TS-400-212[B]	400W	10.5-15	230 / 50	TYPE-B	86.0%
TS-400-224[B]	400W	21.0-30	230 / 50	TYPE-B	87.5%
TS-400-248[B]	400W	42.0-60	230 / 50	TYPE-B	88.5%

### AC Output Receptacle (optional) for TN/TS series

TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-E	TYPE-F
USA	Europe	Australia	U.K.	Japan	GFCI

- ▶ Please consult Mean Well for other kinds of optional output socket.
- ▶ □ = A, B (standard model), C, D, E or F (optional model)



1000~3000W



True Sine Wave

Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.

## Features

- True sine wave output (THD<3%)
- **2 times high surge power for motor related application**
- Advanced digital control by microprocessor
- High efficiency up to 92%
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Front panel indicator for load / battery / operation status
- High frequency design

- Input protections:  
Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage
- Output protections:  
Short circuit / Overload / Over temperature
- Applications:  
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 3 years warranty



### TS-1000



345x 184x 70 mm

### TS-1500



420x 220x 88 mm

### TS-3000



474x 283x 98 mm

<b>Rated output power</b>	<b>1000W</b>	<b>1500W</b>	<b>3000W</b>
<b>Maximum output power</b>	1150W for 3 minutes; 1500W for 10 sec.	1725W for 3 minutes ; 2250W for 10 sec.	3450W for 3 minutes ; 4500W for 10 sec.
<b>Output surge rating</b> (30 cycles)	2000W	3000W	6000W
<b>DC input rated voltage</b>	12VDC, 24VDC or 48VDC		
<b>AC output voltage</b>	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC adjustable via front panel		
<b>Output frequency</b>	50Hz/60Hz adjustable by front panel		
<b>AC output waveform</b>	True sine wave, THD<3.0%		
<b>AC output regulation</b>	±3% of rated output voltage		
<b>No load dissipation</b> (Typ.)	≤ 6W @ standby saving mode	≤ 18W @ standby saving mode	≤ 10W @ standby saving mode
<b>Working temperature</b>	0 ~ +40°C @ 100% load, 60°C @ 50% load		
<b>Safety standards</b>	110V	Compliance to UL458 (except for 48V and only for GFCI receptacle), TS-3000 pending	
	230V	Compliance to EN60950-1	
<b>EMC standards</b>	110V	Compliance to FCC class A	
	230V	Compliance to EN55022 class A (class B for TS-1500 ), E-Mark, EN61000-4-2,3,8, ENV50204	

### 1000W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-1000-112[A]	1000W	10.5-15	110 / 60	TYPE-A	88%
TS-1000-124[A]	1000W	21.0-30	110 / 60	TYPE-A	89%
TS-1000-148[A]	1000W	42.0-60	110 / 60	TYPE-A	90%
TS-1000-212[B]	1000W	10.5-15	230 / 50	TYPE-B	90%
TS-1000-224[B]	1000W	21.0-30	230 / 50	TYPE-B	91%
TS-1000-248[B]	1000W	42.0-60	230 / 50	TYPE-B	92%

### 1500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-1500-112[A]	1500W	10.5-15	110 / 60	TYPE-A	87%
TS-1500-124[A]	1500W	21.0-30	110 / 60	TYPE-A	89%
TS-1500-148[A]	1500W	42.0-60	110 / 60	TYPE-A	90%
TS-1500-212[B]	1500W	10.5-15	230 / 50	TYPE-B	88%
TS-1500-224[B]	1500W	21.0-30	230 / 50	TYPE-B	90%
TS-1500-248[B]	1500W	42.0-60	230 / 50	TYPE-B	91%

### 3000W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TS-3000-112[A]	3000W	10.5-15	110 / 60	TYPE-A	88%
TS-3000-124[A]	3000W	21.0-30	110 / 60	TYPE-A	90%
TS-3000-148[A]	3000W	42.0-60	110 / 60	TYPE-A	91%
TS-3000-212[B]	3000W	10.5-15	230 / 50	TYPE-B	89%
TS-3000-224[B]	3000W	21.0-30	230 / 50	TYPE-B	91%
TS-3000-248[B]	3000W	42.0-60	230 / 50	TYPE-B	92%



### ► Inverter Remote Controller

IRC series is the monitoring and control unit used for the inverter series. It can decode the RS-232 signal sent by inverter series and display through digital meters.



#### Features:

- Wall-mounted and control panel assembly acceptable
- Built-in ON/OFF button
- LED indicators for remote ON/OFF, abnormal and power saving mode
- Equipped with 10FT cable, optional for 25FT or 50FT
- Connect directly to the remote socket of inverter; no power supply needed
- Suitable series:
  - IRC1: TS-700 / 1000 / 1500 / 3000  
TN-1500 / 3000
  - IRC2: TS-700 / 1000 / 1500 / 3000
  - IRC3: TN-1500 / 3000
- 2 years warranty





1500~3000W



# True Sine Wave with Solar Charger

## Features

Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.

- True Sine wave output (THD<3%)
- **2 times high surge power for motor related application**
- Advanced digital control by microprocessor
- High efficiency up to 92%
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Input protections: Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage

- Output protections: Short circuit / Overload / Over temperature / AC circuit breaker
- Front panel indicator for load / battery / operation status
- High frequency design
- **With UPS function: AC by pass / Built-in AC and solar charger**
- Fast transfer time under 10ms ( Inverter mode ↔ By pass mode)
- Solar input current up to 30A max.
- **Optional monitoring software**



### TN-1500



420x 220x 88 mm


### TN-3000



474x 283x 98 mm

<b>Rated output power</b>	<b>1500W</b>	<b>3000W</b>
<b>Maximum output power</b>	1725W for 3 minutes ; 2250W for 10 seconds	3450W for 3 minutes ; 4500W for 10 seconds
<b>Output surge rating</b> (30 cycles)	3000W	6000W
<b>DC input rated voltage</b>	12VDC, 24VDC or 48VDC	
<b>AC output voltage</b>	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC adjustable via front panel	
<b>AC output regulation</b>	±3% of rated output voltage	
<b>No load dissipation</b> (Typ.)	≤18W @ standby saving mode	≤10W @ standby saving mode
<b>Output frequency</b>	50Hz/60Hz adjustable by front panel	
<b>AC output waveform</b>	True sine wave, THD<3.0%	
<b>Transfer time</b> (Typ.)	10ms inverter mode ↔ By pass mode	
<b>Working temperature</b>	0 ~ +40°C @ 100% load, 60°C @ 50% load	
<b>Safety standards</b>	110V	Compliance to UL458 (except for 48V and only for GFCI receptacle), TN-3000 pending
	230V	Compliance to EN60950-1
<b>EMC standards</b>	110V	Compliance to FCC class A
	230V	Compliance to EN5022 class A (class B for TN-1500), E-Mark, EN61000-4-2,3,4,5,6,8,11, ENV50204

## Solar Inverter Block Diagram (Inverter with AC & Solar Charger) - TN Series

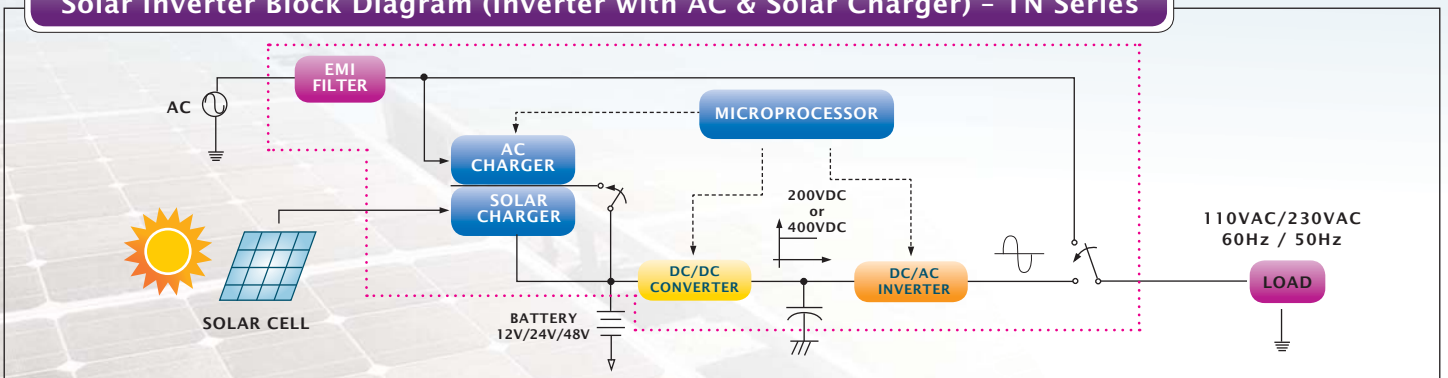

### 1500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-1500-112[A]	1500W	10.5-15	110 / 60	TYPE-A	87%
TN-1500-124[A]	1500W	21.0-30	110 / 60	TYPE-A	89%
TN-1500-148[A]	1500W	42.0-60	110 / 60	TYPE-A	90%
TN-1500-212[B]	1500W	10.5-15	230 / 50	TYPE-B	88%
TN-1500-224[B]	1500W	21.0-30	230 / 50	TYPE-B	90%
TN-1500-248[B]	1500W	42.0-60	230 / 50	TYPE-B	91%

### 3000W


Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-3000-112[A]	3000W	10.5-15	110 / 60	TYPE-A	88%
TN-3000-124[A]	3000W	21.0-30	110 / 60	TYPE-A	90%
TN-3000-148[A]	3000W	42.0-60	110 / 60	TYPE-A	91%
TN-3000-212[B]	3000W	10.5-15	230 / 50	TYPE-B	89%
TN-3000-224[B]	3000W	21.0-30	230 / 50	TYPE-B	91%
TN-3000-248[B]	3000W	42.0-60	230 / 50	TYPE-B	92%



# Setting Procedure via Front Panel for TS/TN Series



## Front Panel

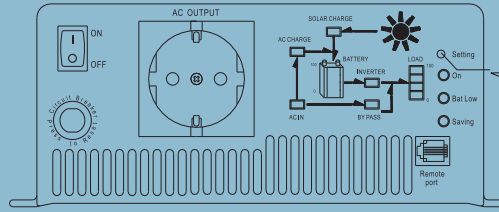

Use an insulated stick to press this setting button

### Function

### Setting Procedure

#### First Level

UPS and Energy Saving Mode Selection

- Step 1 The inverter should be turned off while resetting, input batteries should be connected. AC main can either be connected or disconnected, and the load should be removed.
- Step 2 Use an insulated stick to press the setting button and then turn on the power switch. After pressing for 5 seconds, the inverter will send out a "Beep" sound. User can release the button and go into the setting procedure.
- Step 3 Please refer to table below and check the LED status to see if the operating mode is the one you need. (Factory setting: UPS mode)

Mode	UPS Mode	Energy Saving Mode
<b>LED Status</b>		
<b>On</b>	○	●
<b>Bat Low</b>	★	★
<b>Saving</b>	★	★

● Light  
○ Dark  
★ Flashing

- Step 4 The LED will change state by pressing the setting button for 1 second and then release.

#### Second Level

Output Voltage and Frequency Adjustment

- Step 1 After selecting the operating mode, pressing the setting button for 3~5 seconds and the inverter will send out a "Beep" sound. The button can be released and you can go on to the second section of "voltage / frequency".
- Step 2 Please refer to table below and check the LED status to see if the output voltage / frequency is the one you need (Factory setting: 230VAC/50Hz or 110VAC / 60Hz)

Mode	100VAC (200VAC)	110VAC (220VAC)	115VAC (230VAC)	120VAC (240VAC)
<b>LED Status</b>				
<b>50Hz</b>				
On	●	●	●	●
Bat Low	○	○	●	●
Saving	○	●	○	●
<b>60Hz</b>				
On	★	★	★	★
Bat Low	○	○	●	●
Saving	○	●	○	●

● Light  
○ Dark  
★ Flashing

- Step 3 The LED will change state by pressing the setting button for 1 second and then release.



#### Third Level

Saving Mode Selection

- Step 1 After selecting the output voltage and frequency, press the setting button for 3~5 seconds and the inverter will send out a "Beep" sound. The button can be released and you can go into the setting section for "saving mode".
- Step 2 Please refer to table below and check the LED status. ( Factory setting: saving mode ON )


Mode	ON	OFF
<b>LED Status</b>		
<b>On</b>	★	★
<b>Bat Low</b>	★	★
<b>Saving</b>	●	○

● Light  
○ Dark  
★ Flashing

- Step 3 The LED will change state by pressing the setting button for 1 second and then release.
- Step 4 Press the setting button for 5 seconds and the inverter will send out a "Beep" sound, the button can be released and all the setting are finished. The inverter will automatically store all the setting and then start to operate.

# Comparison of UPS and Energy Saving Mode

## UPS and Energy Saving Block Diagram

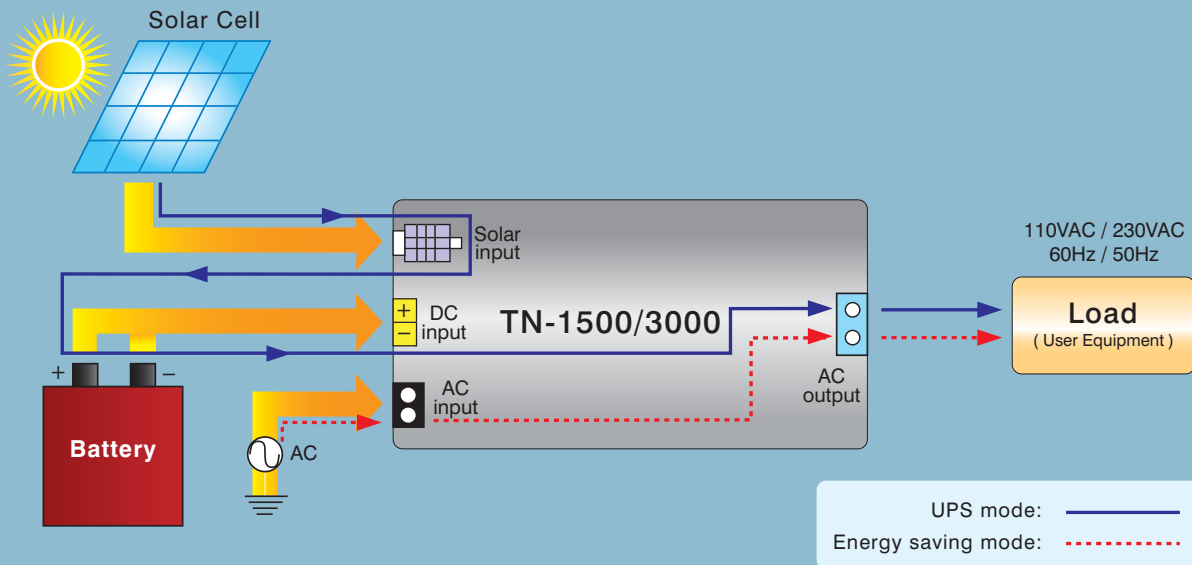

Operation Mode	Description & Special Feature	Possible Application
UPS mode	<p>Utility has the highest priority, the TN unit will function as an UPS system.</p> <p>Utility <math>\xrightarrow{\text{by pass}}</math> load (user equipment)</p> <ul style="list-style-type: none"> <li>• Area with unstable utility</li> <li>• Better performance as compared to conventional UPS (capable of withstanding heavy load)</li> </ul>	<ul style="list-style-type: none"> <li>• Office: computer system, security system, printer, scanner, fax...etc.</li> <li>• Home: personal computer, refrigerator, lighting...etc.</li> <li>• Telecom sub station</li> </ul>
Energy Saving mode	<p>Solar energy has the highest priority. Utility bill can be reduced since the TN unit acquires energy from the solar panel as higher priority.</p> <p>Solar panel <math>\rightarrow</math> battery bank <math>\rightarrow</math> inverter <math>\rightarrow</math> load (user equipment)</p> <ul style="list-style-type: none"> <li>• With additional solar panel. It can be used as individual sub power station (Independent power station)</li> <li>• Area without utility or unstable utility</li> <li>• Cut cost on utility bill</li> </ul>	<ul style="list-style-type: none"> <li>• High altitude location or green building: weather station, lighting, hair dryer...etc.</li> <li>• Yacht: TV, DVD, radio, air conditioner, coffee maker...etc.</li> <li>• Vehicle: mobile phone charger, notebook, electronic pot...etc.</li> </ul>

### Notice:


- **Modified sine wave inverter** is a stepped waveform that is designed to have characters similar to the sine wave shape of utility power. It is suitable for most household applications, such as notebook, PC, MP3 player, cell phone charger and digital camera...etc. but may present certain compromises with some loads such as ham radio, microwave oven(with clock), laser printer, motor speed controller, transformer-less charger, and load with high surge demand (capacitance, fluorescent lamp...etc.)
- **True sine wave inverter** is suitable for most AC loads, including all electronic equipment of household, motor related application such as electronic drill, linear and switching power supply used in electronic equipment.

# Applications



- 1 Solar Panel
- 2 Battery Bank
- 3 Mean Well Solar Inverter (TN Series)
- 4 AC Input (by-pass)
- 5 Utility Input

- 1 Utility Input (Shore)
- 2 Mean Well Battery Charger (PB series)
- 3 Battery Bank
- 4 Mean Well Power Inverter (TS series)
- 5 AC Outlet

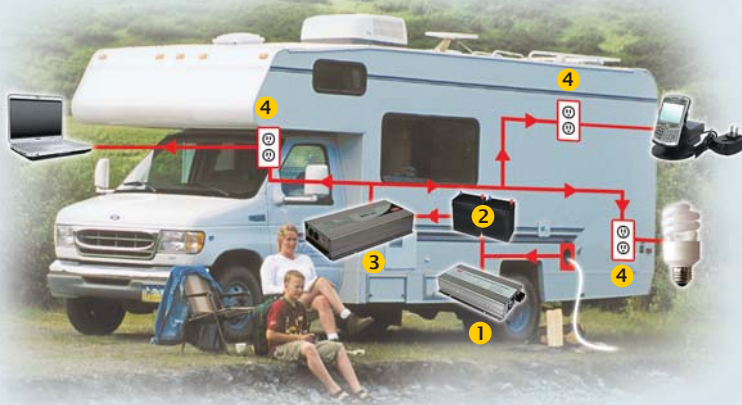

- 1 Mean Well Battery Charger (PB series)
- 2 Battery Bank
- 3 Mean Well Power Inverter (TS series)
- 4 AC Outlet

## Applications:

TV, DVD, notebook, personal computer, lighting, refrigerator, fan, radio, hair dryer, electronic pot, coffee maker, and cell phone charger...etc.



#### **Taiwan**

##### **MEAN WELL ENTERPRISES CO., LTD.**

No. 28, Wu-Chuan 3rd Road, Wu Ku Ind. Park, Taipei County, Taiwan, 248

**Tel** +886-2-2299-6100(rep.)

**Fax** +886-2-2299-6200(rep.) +886-2-2298-0818(sales)

**E-mail** [info@meanwell.com](mailto:info@meanwell.com) **Web** [www.meanwell.com](http://www.meanwell.com)

#### **China**

##### **GUANGZHOU MEAN WELL ELECTRONICS CO., LTD.**

2nd Floor, No. A Building, Yuean Ind. Park, Dongpu Town,  
Tianhe District, GuangZhou, China

**Tel** +86-20-2887-1200 **Fax** +86-20-8201-0507

**E-mail** [info@meanwell.com.cn](mailto:info@meanwell.com.cn) **Web** [www.meanwell.com.cn](http://www.meanwell.com.cn)

#### **China**

##### **SUZHOU MEAN WELL TECHNOLOGY CO., LTD.**

No. 77, Jian-Ming Rd. Dong-Qiao, Pan-Yang Ind. Park,  
Huang-Dai Town, Xiang-Cheng District, SuZhou, Jiang-Su, China

**Tel** +86-512-6508-8600 **Fax** +86-512-6508-8700

**E-mail** [info@meanwell.cc](mailto:info@meanwell.cc) **Web** [www.meanwell.cc](http://www.meanwell.cc)

#### **U.S.A.**

##### **MEAN WELL USA, INC.**

44030 Fremont Blvd., Fremont, CA 94538, U.S.A.

**Tel** +1-510-683-8886 **Fax** +1-510-683-8899

**E-mail** [info@meanwellusa.com](mailto:info@meanwellusa.com) **Web** [www.meanwellusa.com](http://www.meanwellusa.com)

#### **Europe**

##### **MEAN WELL EUROPE B.V.**

Spinnerij 73-75, 1185 ZS Amstelveen, the Netherlands

**Tel** +31-20-345-3795 **Fax** +31-20-640-3547

**E-mail** [info@meanwell.eu](mailto:info@meanwell.eu) **Web** [www.meanwell.eu](http://www.meanwell.eu)

Please contact your local distributor:



For more information, please visit:

**[www.meanwell.com](http://www.meanwell.com)**

April, 2010